

FR 03 0012.

1304/000302



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 16 FEB 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03100252.0

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

BEST AVAILABLE COPY

R C van Dijk



Anmeldung Nr:
Application no.: 03100252.0
Demande no:

Anmeldetag:
Date of filing: 06.02.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

TRAY MECHANISM FOR AN OPTICAL DISC REPRODUCING APPARATUS

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11B21/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

"TRAY MECHANISM FOR AN OPTICAL DISC REPRODUCING APPARATUS"**5 FIELD OF THE INVENTION**

The present invention first relates to a tray mechanism consisting of sliding means comprising an electrical tray motor, for moving a tray – provided for containing an optical disc on which information is recorded – from a projected position, for the placement of the disc or its discharge, to a contained one, for the reproduction of recorded information, or reciprocally,
10 and a drive power source, for supplying an applied voltage to said tray motor, said sliding means also including control means for supplying different values of the voltage applied to the tray motor according to different mechanical functions controlled by said motor.

The invention also relates to an optical disc reproducing apparatus comprising an apparatus body, pickup means for optically picking up recorded information from an optical disc
15 and a tray mechanism for sliding said disc, with respect to said apparatus body, either to a projected position, for the placement of the disc or its discharge, or to a contained position, for the reproduction of recorded information, said tray mechanism consisting of sliding means comprising an electrical tray motor and a drive power source for supplying an applied voltage to said tray motor, said sliding means also including control means for supplying different
20 values of the voltage applied to the tray motor according to different mechanical functions controlled by said motor.

The invention is for instance applicable in a CD or DVD drive.

BACKGROUND OF THE INVENTION

In optical drives, a commonly used mechanism for loading a disc in the drive is that of a tray mechanism : the tray is either in an "OUT" position, in which the disc can be
25 placed on it or taken out, or in an "IN" position, in which the disc is loaded in the drive, and can be pushed out or pulled back by an electrical direct current motor. For moving the tray out or in, a voltage is applied to the motor for a specified amount of time. During this time, this voltage can have different values at different moments, first to create a smooth motion of the
30 tray, and also because the tray motor has to control other mechanical functions of loading or unloading the disc (for example an extra force is needed when the magnetic clamper has to release the disc).

With the applied voltages, the tray must move out and in within a specified time. It is then important that the electrical and mechanical specifications of the tray mechanism are
35 known within small tolerances and do not change during its lifetime. If the specifications do not meet the applied voltages, this would result in a too fast or too slow tray movement. In worst

case situations, the tray could even not move at all, for example when the friction of the tray has increased because of contamination.

SUMMARY OF THE INVENTION

5 It is a first object of the invention to improve the performance of the DC tray motor, so that the specifications of the tray mechanism better meet the voltages applied to the motor.

To this end, the invention relates to a tray mechanism as defined in the Introductory part of the description and which is moreover characterized in that said sliding means includes a motor current feed-forward loop comprising the following elements :

- 10 - a first direct branch, itself comprising in series a first amplifier of the input voltage applied to the loop, the tray motor and a resistor ;
- a second branch, the input of which is connected between the output of the tray motor and the input of the resistor that is not connected to the earth, said second branch itself comprising in series a second amplifier and an adder, and said adder receiving on one input the
- 15 input voltage applied to the loop and on the other one the output of said second amplifier.

The document US 6373650 describes a linear motor control circuit, used for moving according to several operating modes the read/write heads of memory disc drives. The driver circuit of the linear motor includes a non-linear feedback circuit itself comprising a sense amplifier, followed first by a ramping amplifier, either connected in series with the sense

20 amplifier in a first head parking/unparking mode of operation, for modifying the signals from the sense amplifier, or bypassed in the other modes, and then by a feedback amplifier, connected either to the output of said ramping amplifier in the first mode or to the output of said sense amplifier in the other modes and switched to provide either a first predetermined gain in said first mode or another predetermined one in the other modes, the selective

25 connection of the ramping amplifier according to the operating mode allowing to change the sign of the feedback and therefore to drive the motor as a function of either a positive or a negative feedback signal. With respect to that solution, the technical one according to the present invention is however much simpler and allows to achieve a linear and closer control of the speed of the motor.

30 It is another object of the invention to propose an optical disc reproducing apparatus in which such a mechanism is provided.

To this end, the invention relates to a reproducing apparatus as defined in the Introductory part of the description and which is moreover characterized in that the sliding means include a motor current feed-forward loop comprising the following elements :

- 35 - a first direct branch, itself comprising in series a first amplifier of the input voltage applied to the loop, the tray motor and a resistor ;

- a second branch, the input of which is connected between the output of the tray motor and the input of the resistor that is not connected to the earth, said second branch itself comprising in series a second amplifier and an adder, and said adder receiving on one input the input voltage applied to the loop and on the other one the output of said second amplifier.

5

With respect to an open loop steering of the motor, it appears that, with the technical solution according to the invention, the velocity of the motor is less dependent of friction (that can differ from one mechanism to the other and generally increases during lifetime because of contamination). Moreover, said velocity, based on a measured or specified motor constant of the tray motor, can be controlled quite accurately and is more independent from other parameters. The velocity being better controlled, a much smoother opening and closing of the tray is possible, no overcompensation of the voltage is needed to handle tolerances of the tray mechanism, and a better timing is possible, for example for reducing the velocity of the tray when it is about to hit an end stop.

10

BRIEF DESCRIPTION OF THE DRAWINGS

15

The invention will now be described, by way of example only, in a more detailed manner and with reference to the accompanying drawings, in which :

- Fig.1 illustrates the main elements of an apparatus for reproducing recorded information ;
- Fig.2 shows the motor current feed-forward principle according to the invention ;
- Fig.3 shows the model used for the tray motor.

20

DETAILED DESCRIPTION OF THE INVENTION

As shown in Fig.1, an apparatus for reproducing information recorded on an optical disc usually comprises the main following elements : an apparatus body 11, pickup means 12 for optically picking up recorded information from an optical disc rotated by a motor (not referenced) and a tray mechanism 13 for moving a tray containing said disc either to a so-called projected position A (with respect to said apparatus body 11), for the placement of the disc in view of the reproduction of recorded information or its discharge when said reproduction is brought to its end, or to a so-called contained position B, in which the reproduction operation can be carried out. The tray mechanism 13 itself consists of sliding means mainly composed of an electrical tray motor 14 and a drive power source 15 for supplying an applied voltage to the tray motor 14, said sliding means also including control means for supplying different values of the voltage applied to the tray motor according to different mechanical functions selectively controlled by said motor at different moments (for example, an extra force is needed when the disc has to be released).

25

30

35

According to the invention, it is proposed to provide in the sliding means, for the tray steering, a current feed-forward loop. The diagram of Fig.2 shows the principle of such a

motor current feed-forward loop, which includes a direct branch 21 and a feedback branch 22. The branch 21 successively comprises an amplifier 211 (reference G in Fig.1), the tray motor 212 and a resistor 213 (reference R(C)). The branch 22, the input of which is connected between the output of the tray motor and the input of the resistor 213 not connected to the earth, successively comprises an amplifier 221 (reference A) and an adder 222. The adder 222 receives on one input the input voltage V(in) applied to the loop and on the other input the output of the amplifier 221 and its output is connected to the input of the amplifier 211.

For the tray motor, a very simple model is used. As shown in Fig.3, said model contains the self-inductance 31 of the coils, an internal resistance 32 (R(M)) and a voltage source 33 (V(emk)) that represents the back electromotive force generated by the coil of the motor. This model can even be simplified by assuming that the signals applied to the motor are of relatively low frequencies (in this situation, the influence of the self-inductance of the coils can be ignored) and that the voltage V(emk) of the voltage source 33 is a quasi-static signal that is proportional to the angular velocity of the motor.

From these assumptions, in order to show what influence the current feed-forward loop has on the behaviour of the motor in relation to the voltage applied to the system, the loop transfer can be calculated. The output voltage of the motor driver equals :

$$V(\text{out}) = G \cdot (V(\text{in}) + A \cdot V(\text{C})) \quad (1)$$

with :

G = gain of the amplifier 211 ;
V(In) = Input voltage applied to the loop ;
A = gain of the amplifier 221 ;
V(C) = voltage at the output of the resistor 213 not connected to the earth.

The expression (1) also be written :

$$V(\text{out}) = G \cdot (V(\text{in}) + A \cdot I(\text{M}) \cdot R(\text{C})) \quad (2)$$

with I(M) = current through the resistor 213 (R(C)),

or :

$$V(\text{out}) = I(\text{M}) \cdot (R(\text{C}) + R(\text{M})) + V(\text{emk}) \quad (3)$$

By combining the expressions (2) and (3), one gets the following expression :

$$I(\text{M}) \cdot (R(\text{C}) + R(\text{M})) + V(\text{emk}) = G \cdot (V(\text{in}) + A \cdot I(\text{M}) \cdot R(\text{C})) \quad (4)$$

which can also be written in the form :

$$G \cdot V(\text{in}) = V(\text{emk}) + I(\text{M}) \cdot (R(\text{C}) + R(\text{M})) - G \cdot A \cdot I(\text{M}) \cdot R(\text{C}) \quad (5)$$

So, if the gain is chosen in the feed-forward loop with the value :

$$A = (R(\text{C}) + R(\text{M})) / (G \cdot R(\text{C})) \quad (6)$$

Then the expression (5) becomes :

$$G \cdot V(\text{in}) = V(\text{emk}) \quad (7)$$

In this expression (7), it can be seen that the feed-forward loop acts as a negative resistance that compensates for the motor resistance R(M). As said above, the back electromotive force

V_{emk} of the motor is proportional to the angular velocity of the motor. So, from the expression (7), it can be concluded that by choosing the correct feed-forward gain, the tray motor can be forced to have an angular velocity that is proportional to the input voltage $V(C)$.

5 In practice, the effect of the feed-forward is slightly reduced because of the fact that the gain cannot be set exactly to the calculated value. Tolerances in the system and changing characteristics because of aging could indeed result in a gain that is higher than the calculated optimum, which may result in a less stable loop. When working with a fixed gain, the gain has therefore to be chosen conservatively low (a more complex method would be using the current measurement for measuring the characteristics of the loop and, based on this
10 measurement, selecting the gain more accurately, which improves the performance of the feed-forward loop).

It has been shown that the loop structure according to the invention results in a tray motor behaviour that comes close to a velocity controlled steering and has the advantages indicated hereinabove.

15

CLAIMS :

1. A tray mechanism consisting of sliding means comprising an electrical tray motor, for moving a tray – provided for containing an optical disc on which information is recorded – from a projected position, for the placement of the disc or its discharge, to a contained one, for the reproduction of recorded information, or reciprocally, and a drive power source, for supplying an applied voltage to said tray motor, said sliding means also including control means for supplying different values of the voltage applied to the tray motor according to different mechanical functions controlled by said motor, wherein said sliding means includes, for the tray steering, a motor current feed-forward loop comprising the following elements :

5 - a first direct branch, itself comprising in series a first amplifier of the input voltage applied to the loop, the tray motor and a resistor ;
- a second branch, the input of which is connected between the output of the tray motor and the input of the resistor that is not connected to the earth, said second branch itself comprising in series a second amplifier and an adder, and said adder receiving on one input the input voltage applied to the loop and on the other one the output of said second amplifier.
15

2. An optical disc reproducing apparatus comprising an apparatus body, pickup means for optically picking up recorded information from an optical disc and a tray mechanism for sliding said disc, with respect to said apparatus body, either to a projected position, for the placement of the disc or its discharge, or to a contained position, for the reproduction of recorded information, said tray mechanism consisting of sliding means comprising an electrical tray motor and a drive power source for supplying an applied voltage to said tray motor, said sliding means also including control means for supplying different values of the voltage applied to the tray motor according to different mechanical functions controlled by said motor at different moments, wherein said sliding means includes, for the tray steering, a motor current feed-forward loop comprising the following elements :

25 - a first direct branch, itself comprising in series a first amplifier of the input voltage applied to the loop, the tray motor and a resistor ;
- a second branch, the input of which is connected between the output of the tray motor and the input of the resistor that is not connected to the earth, said second branch itself comprising in series a second amplifier and an adder, and said adder receiving on one input the input voltage applied to the loop and on the other one the output of said second amplifier.
30

Abstract

The invention relates to a tray mechanism consisting of sliding means comprising an electrical tray motor, for moving a tray – provided for containing an optical disc on which information is recorded – from a projected position, for the placement of the disc or its discharge, to a contained one, for the reproduction of recorded information, or reciprocally, and a drive power source, for supplying an applied voltage to said tray motor. Control means supply different values of the voltage applied to the tray motor according to different mechanical functions controlled by said motor. According to the invention, it is provided, for the tray steering a motor current feed-forward loop comprising a first direct branch, itself comprising in series a first amplifier of the input voltage applied to the loop, the tray motor and a resistor, and a second branch, itself comprising in series a second amplifier and an adder, which receives on one input the input voltage applied to the loop and on the other one the output of said second amplifier.

Fig. : 2

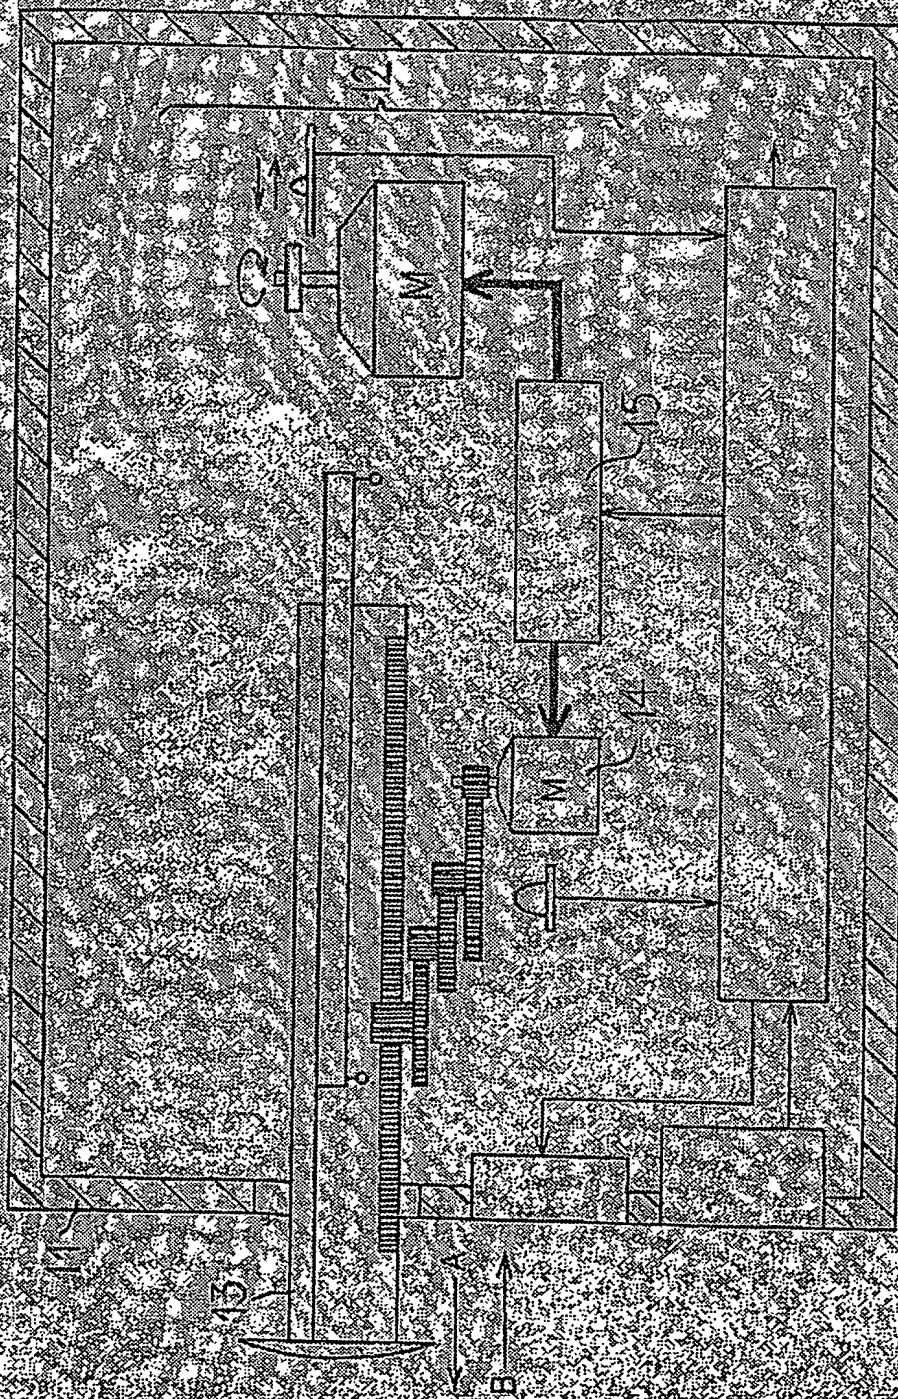


FIG. 1

2/2


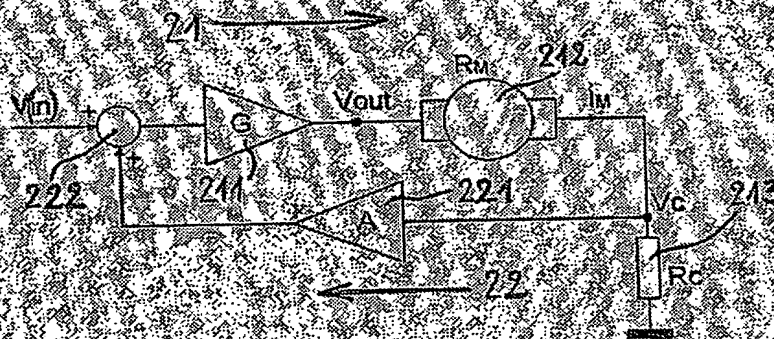


FIG 2



FIG 3

PCT Application
PCT/IB2004/000302



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.